

REPLACING THE FRONT SHROUD



To ensure that Human Touch[®] products are repaired in a manner that is fully consistent with the practices used during the manufacturing process, Human Touch requires that all product repairs are performed using only factory-new parts and in accordance with these product repair instructions.

SERVICE LEVEL: 2

Tools Required: Nail clipper or other instrument suitable for cutting zip ties, one large zip tie

REMOVING THE FRONT SHROUD

1. Standing behind the chair, grasp the rear shroud on both sides and pull upward just enough to detach it from the chair base (Fig.1).
2. Slide the shroud off to the left to expose the connector junction box (Fig.2).
3. Using a nail clipper or other instrument suitable for cutting zip ties, cut the two zip ties that secure the junction box, then use your fingers to snap the junction box open.

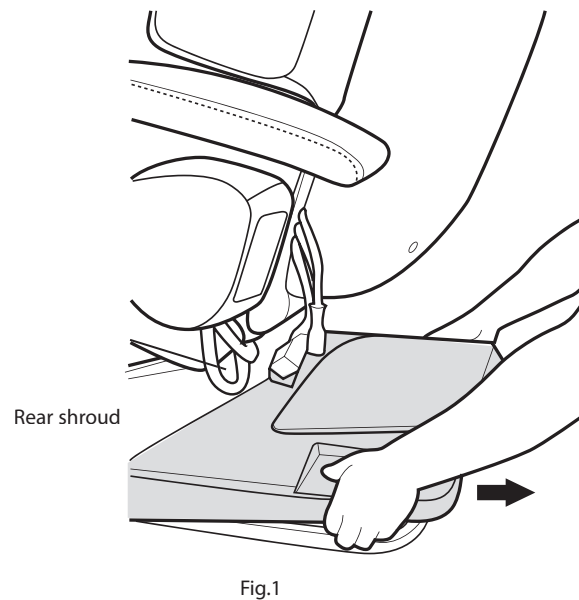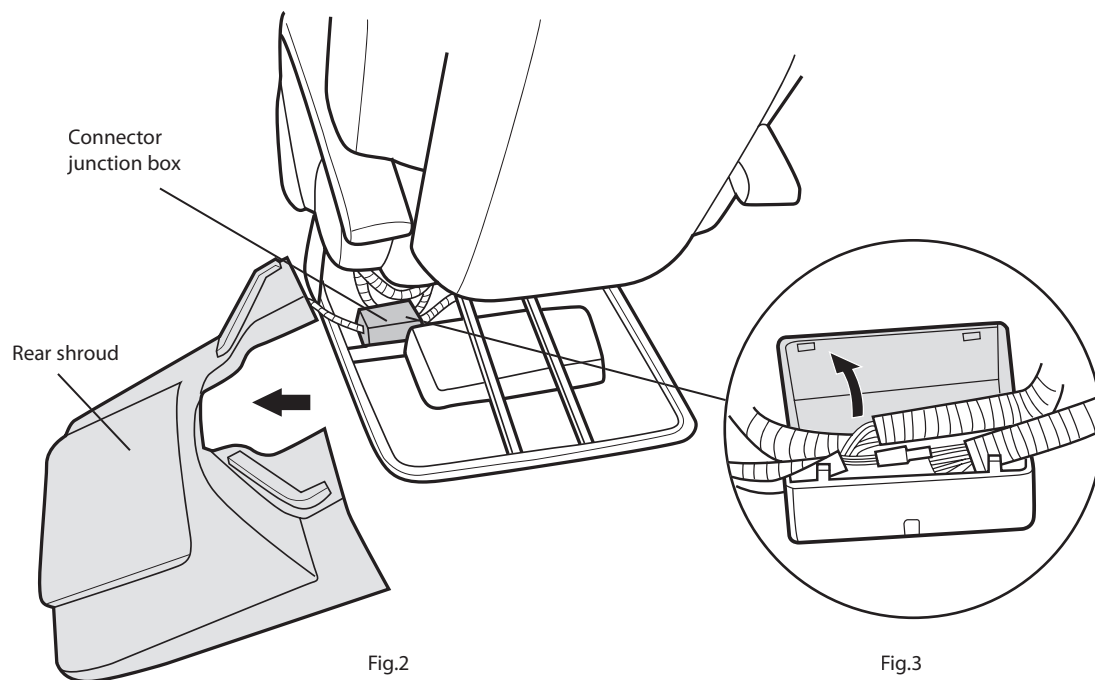

4. Locate the connector that runs from the front shroud to the connector junction box, then disconnect the connector.
5. Pull upward on the front shroud to detach it from the chair, then pull it toward you to remove it.

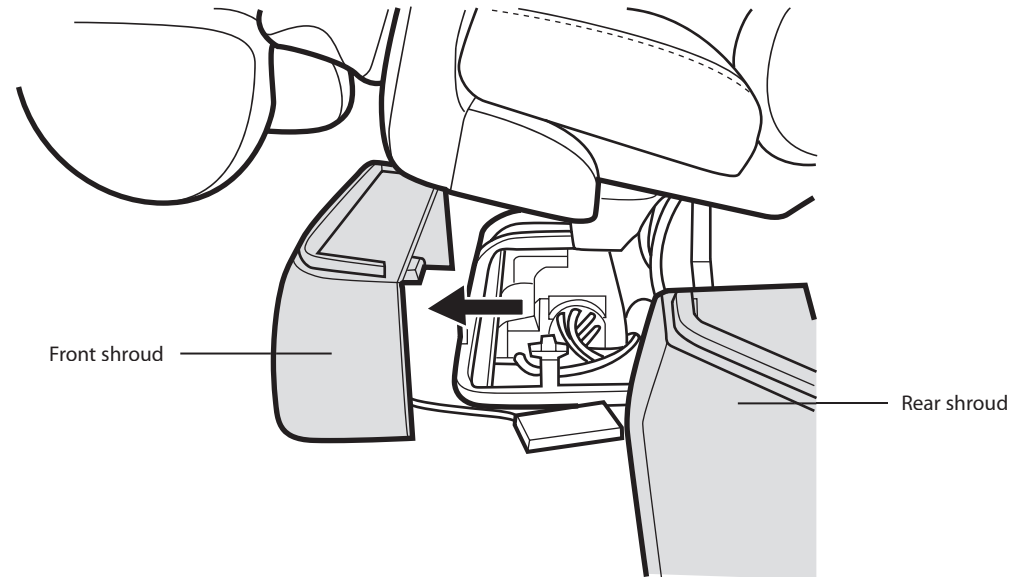


Fig.4

INSTALLING THE NEW FRONT SHROUD

1. Place the front shroud into position, then connect the connector on the shroud to the corresponding connector in the connector junction box.
2. Push the front shroud firmly forward then down, until it snaps into place (Fig.5).
3. Position all of the connectors inside the junction box, then, aligning the large holes on the cover with the large holes on the base, snap the junction box cover into place.
4. Secure the junction box cover using a large zip tie (Fig.6).
5. Place the rear shroud into position, insert the two tabs on the front of the shroud into the two corresponding slots on the chair base, then push down firmly to secure it.

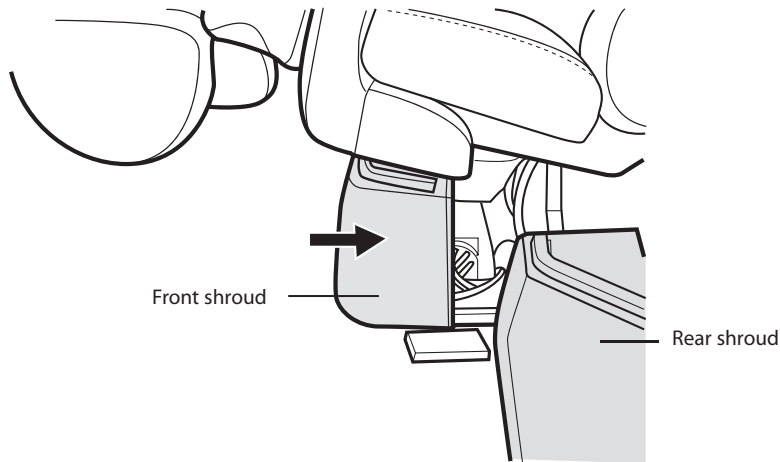


Fig.5

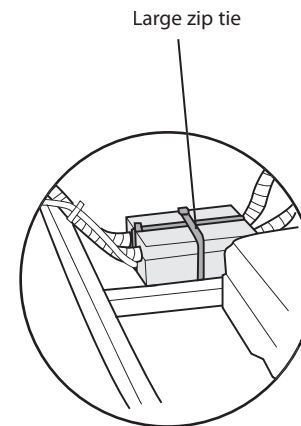


Fig.6